



12 Ft
100 Ft



R RESIDENTIAL GRADE


CONNECTIONS

- Discharge: 3/4" or 1"
- Inlet: 2"
- Vent: 1-1/4" or 1-1/2"

PRODUCT FEATURES

- Used to pump gray water away from a variety of fixtures in residential applications.
- The system is able to discharge the waste up to 12 feet vertical and/or 100 feet horizontal.

PUMP CURVE

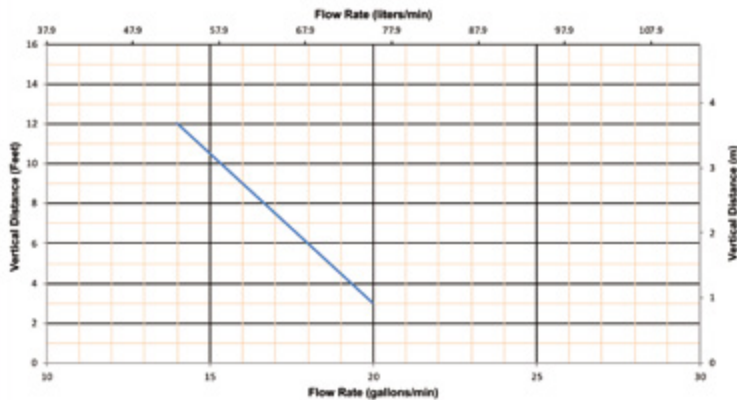

OPTIONAL ACCESSORIES

Descaler
(Part N° 052)
See page 28



TECHNICAL SPECIFICATIONS

- Pump type:** Drain Pump
- Electrical:** 120 V – 60 Hz / 5.5 Amps (Max)
- Motor:** 0.2 HP oil-filled thermally protected motor
- Capacitor rating:** 25 microfarad
- Operating Temperature:** 104°F (110°F Max.)
- Power cord length:** 48-1/2"
- Noise level:** ≤ 44 dBA (Lp) (measured at 3 ft.)
- Discharge pipe diameter:** 3/4" or 1"
- Discharge rate at 12 ft:** 14 GPM
- Discharge rate at 3 ft:** 20 GPM
- Shut-off head:** 26 ft.
- Normal running time:** 3-5 seconds (Short bursts)
- Capacity:** 0.9 gallons / 3.4 liters
- Inlets:** 2" (sides)
- Method of activation:** Membrane/microswitch
- Shower base height:** 5" min
- Weight:** 12 lbs / 5.4 kg
- Certifying agencies:** CSA (IPC, NSPC)
- Connections:** Sink, shower

DIMENSIONAL DRAWINGS

